





Performance Characteristics

Typical RSA torque values for standard models are shown in the composite curves shown below. The curves indicate normal working torque at average factory settings. A wide range of damping torque is available for each model. Damping torque is typically set within $\pm 10\%$ of the specified test value.

Typical Performance Curves
FOR MODEL "RC" SHOCK ABSORBERS

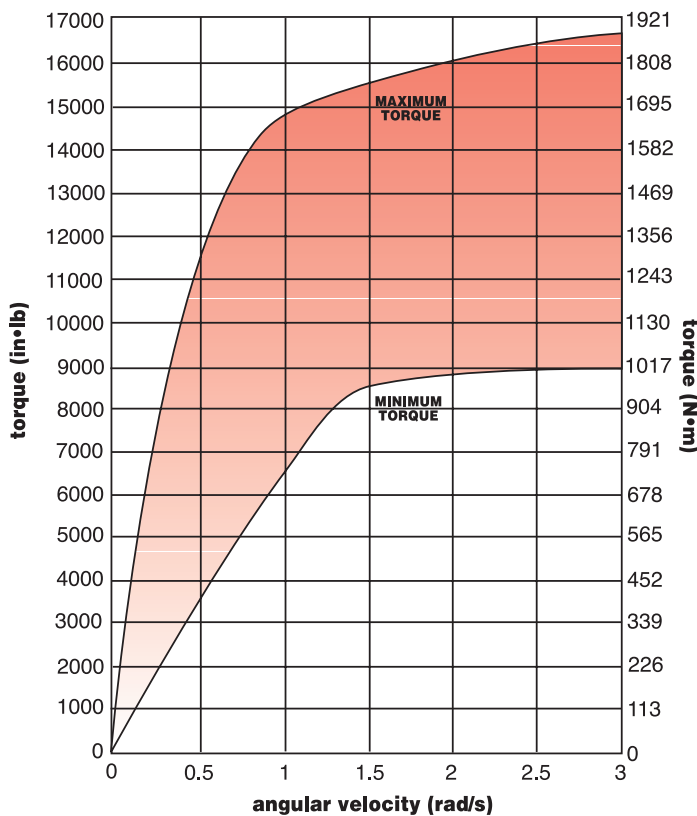

Typical Performance Curves
FOR MODEL "H" SHOCK ABSORBERS

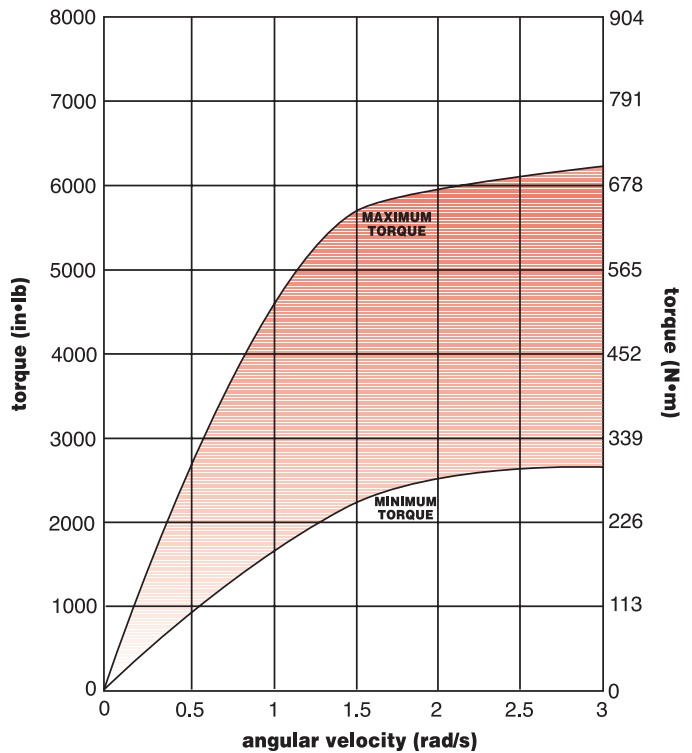

Typical Performance Curves
FOR MODEL "SB" SHOCK ABSORBERS

